


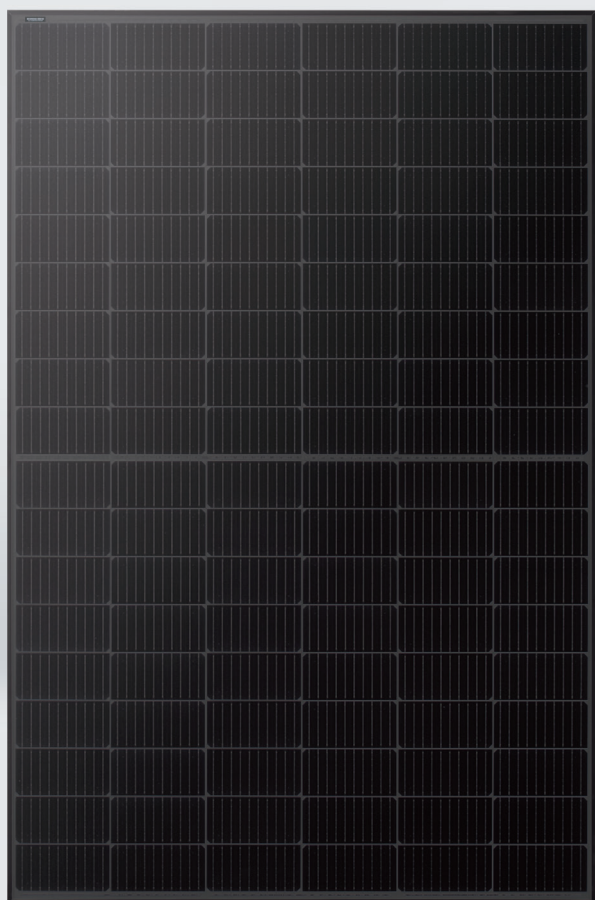

410W

Maximum
Power Output

21.0%

Maximum
Module Efficiency

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 25GW+ capacity of solar cell and 4.5GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SS8-54HSB 390-410M

All Black Module



High Power Output

Solarspace efficient cells with MBB and high-density encapsulation ensures higher power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle




More Power Generation

Gallium doped wafers reduce annual power degradation, optimized circuit design ensures more power generation under shading



Aesthetic Design

All black design brings highly consistent appearance for rooftops

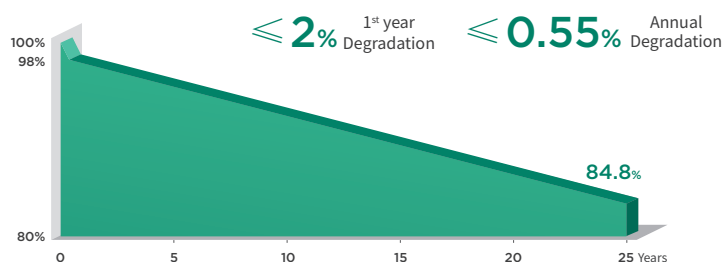

12 Years Product Warranty **25** Years Linear Power Warranty

Comprehensive Certificates

- IEC61215
- IEC61730
- IEC61701
- IEC62716
- DINEN60068
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics STC: Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5


Module Type	SS8-54HSB -390M	SS8-54HSB -395M	SS8-54HSB -400M	SS8-54HSB -405M	SS8-54HSB -410M
Maximum Power (Pmax) [W]	390	395	400	405	410
Open-Circuit Voltage (Voc)[V]	36.85	36.98	37.07	37.23	37.32
Maximum Power Voltage (Vmp) [V]	30.64	30.84	31.01	31.21	31.45
Short-Circuit Current (Isc)[A]	13.61	13.70	13.79	13.87	13.95
Maximum Power Current (Imp) [A]	12.73	12.81	12.90	12.98	13.04
Module Efficiency	19.98%	20.23%	20.48%	20.74%	21.00%
Power Tolerance	0~+5W				
Temperature coefficient of Isc	+0.045%/°C				
Temperature coefficient of Voc	-0.265%/°C				
Temperature coefficient of Pmax	-0.335%/°C				

Electric Characteristics NMOT: Irradiance 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5


Module Type	SS8-54HSB -390M	SS8-54HSB -395M	SS8-54HSB -400M	SS8-54HSB -405M	SS8-54HSB -410M
Maximum Power (Pmax) [W]	294	298	302	306	310
Open-Circuit Voltage (Voc)[V]	34.62	34.75	34.88	35.12	35.23
Maximum Power Voltage (Vmp) [V]	28.89	29.08	29.27	29.49	29.72
Short-Circuit Current (Isc)[A]	10.89	10.96	11.03	11.10	11.16
Maximum Power Current (Imp) [A]	10.19	10.25	10.32	10.38	10.44

Mechanical Characteristics

Cell Type	Mono PERC (M10)
Number of Cells	108(6x18)
Dimensions	1722X1134X30mm
Weight	21.0kg
Glass	Single glass, 3.2mm coated tempered glass
Frame	Black, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC),12AWG(UL) 300mm (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC-EVO2 or MC4 Compatible
Packaging	36 Pieces/Pallet, 936 pieces/40' container

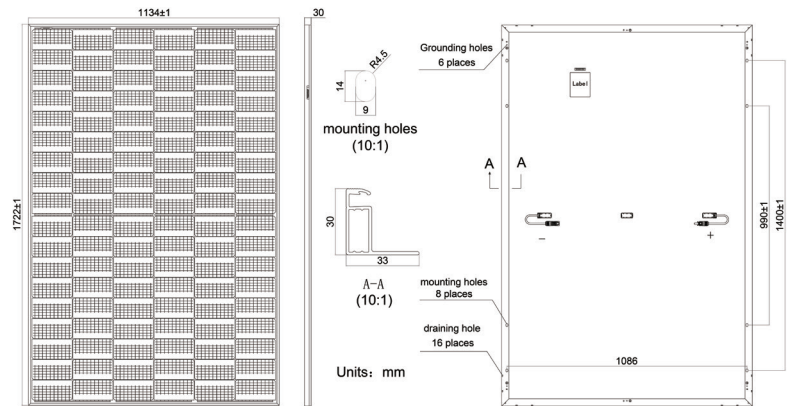Engineering Design**Operating Conditions**

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Mechanical Load Front Rear	5400Pa(112lb/ft ²)
Mechanical Load Back Rear	2400Pa(50lb/ft ²)
Nominal operating cell temperature	45±2°C
Safety Class	Class II
Fire Rating	Class C

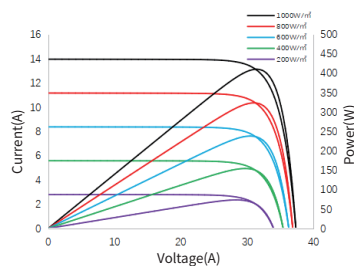CharacteristicsI-V/P-V Curve at Different Irradiation
SS8-54HSB -400MI-V Curve at Different Temperature
SS8-54HSB -400M